



# BOX VAN BODY WITH SIDE ROLLER SHUTTERS



**BV2**

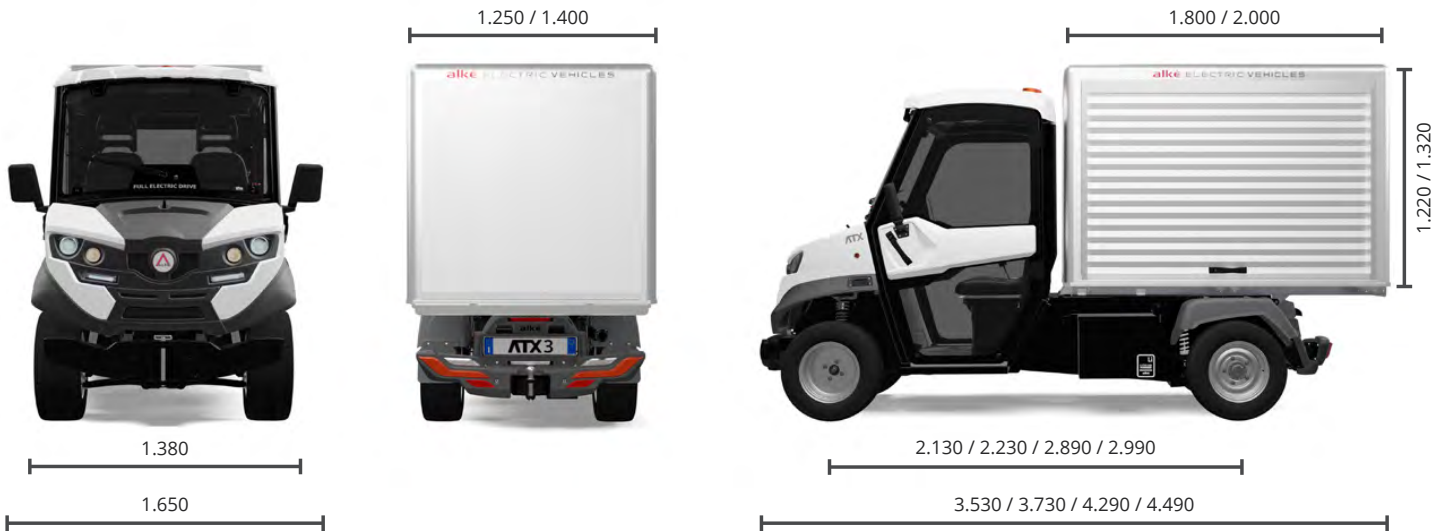

Alke' electric vehicles are studied for logistic operations and they can mach eco-friendly mobility with high-level performances. This configuration is normally requested by hospitals and clinics for medical waste transportation, by turistic resorts to move cleaned and dirty whites, by catering companies to deliver ready meals with the insulated boxes they normally use. In all these situations,

Alke' electric vehicle with shutters is chosen, as well as for the build quality and performances, for small dimensions and for the total absence of environmental and noise pollution, a value added for all those structures who want to provide a comfortable environment to their guests. All Alke' vehicles, including this configuration, are N1 type-approved for the circulation on public roads.

Box Van Body 180 x 125 cm - compatible models	ATX 320 E ATX330 E/ED/EH/EDH ATX340 E/ED/EH/EDH	
Box Van Body 200 x 140 cm - compatible models	ATX330 E/ED/EH/EDH ATX340 E/ED/EH/EDH	
N1 road homologation	•	
<b>model ATX</b>	<b>length</b>	<b>height</b>
ATX 330E [ mm ]	3.530 <sup>(1)</sup> / 3.730 <sup>(2)</sup>	2.000(3) / 2.100(4) (with standard tyres)
ATX 330ED [ mm ]	4.290 <sup>(1)</sup> / 4.490 <sup>(2)</sup>	
ATX 330EH [ mm ]	3.530 <sup>(1)</sup> / 3.730 <sup>(2)</sup>	
ATX 330EDH [ mm ]	4.290 <sup>(1)</sup> / 4.490 <sup>(2)</sup>	
ATX 340E [ mm ]	3.530 <sup>(1)</sup> / 3.730 <sup>(2)</sup>	
ATX 340ED [ mm ]	4.290 <sup>(1)</sup> / 4.490 <sup>(2)</sup>	
ATX 340EH [ mm ]	3.530 <sup>(1)</sup> / 3.730 <sup>(2)</sup>	
ATX 340EDH [ mm ]	4.290 <sup>(1)</sup> / 4.490 <sup>(2)</sup>	
width of vehicle (with wing mirrors closed / open)	[ mm ]	1.380 / 1.650

loading capacity of vehicle is given by the load capacity (chassis) of the model on which is mounted the module less the weight of the module and optionals/accessories

## box van body with side roller shutters

module: weight		
vehicle's weight: empty weight (chassis) of the model on which is mounted the module plus the weight of the module itself and optionals/accessories	[ kg ]	130 <sup>(3)</sup> / 170 <sup>(4)</sup>
module: external dimensions	[ mm ]	1.800x1.250x1.220 <sup>(3)</sup> 2.000x1.400x1.320 <sup>(4)</sup>
module: volume	[ mm ]	2.8 <sup>(3)</sup> / 3.8 <sup>(4)</sup>
structure with plywood panels fiberglass coated and with aluminum profiles platform in aluminium checkered sheet isothermal insulation		
lockable lateral doors with side roller shutters for easy access to all the inner areas of the box		

• as standard   Δ optional   ! compatible but not type-approved for road circulation  
 — not available   <sup>(1)</sup> vehicle with standard wheelbase   <sup>(2)</sup> vehicle with long wheelbase  
<sup>(3)</sup> standard dimensions box van body   <sup>(4)</sup> large dimensions box van body



**optionals and accessories**

interior LED lighting	•
locks	•
2 internal shelf	Δ

**NOTE**

**This module is powered by** the battery of the vehicle therefore can affect the autonomy of the vehicle itself. **For all the other data** refer to the technical specs of the model on which is fitted the module. **The technical specifications**, design and performance of the products listed in this technical sheet are indicative and may undergo modifications without forewarning.



Via Cile, 5  
35127 Padua | Italy



+39.049.8702400  
+39.049.761208



info@alke.com

**WWW**

www.alke.com



© 2021 Alkè

Rev. 210215



ISO 9001:2015 - BN17607/17301  
ISO 14001:2015 - BN17607/17302  
OHSAS 18001:2007 - BN17607/17303

• as standard   Δ optional   ! compatible but not type-approved for road circulation  
— not available   <sup>(1)</sup> vehicle with standard wheelbase   <sup>(2)</sup> vehicle with long wheelbase  
<sup>(3)</sup> standard dimensions box van body   <sup>(4)</sup> large dimensions box van body

The technical specifications, design and performance levels indicated in this technical data sheet are by way of example only and may be subject to modifications without prior notice.